



Laboratorio Elettrofisico  
**LE GROUP**



## HARD MAGNETIC MATERIALS **AMH-500-P**

AMH-500-P is a DC automatic measuring system for characterization of hard magnetic materials, such as Alnico, Ferrite, NdFeB, SmCo and bonded magnets. Measurements are performed at temperature ranging from ambient up to 220°C with special heating poles.

The AMH-500-P meets International Standard IEC 60404-5 and ASTM A977: measurement of magnetically hard materials in closed circuit using an electromagnet.

# AMH-500-P

## HYSTERESISGRAPH

### KEY BENEFITS

---

- Remanence  $B_r$ , coercivity  $H_{cB}$ ,  $H_{cJ}$ , max energy product  $BH_{max}$ ,  $H_{knee}$ , recoil permeability ( $\mu_{recoil}$ ), etc.
- Temperature measurements from ambient up to 220 °C
- Automatic measurement of 1st and 2nd quadrant, complete hysteresis loop, recoil line
- Wide range of accessories for any sample shape or size

### STANDARD CONFIGURATION

---

- Electrical Cabinet
- Electromagnet + pole pieces
- Measuring coil
- Reference sample, for day-to-day control
- Dedicated software Xenon
- PC and printer

### IMPROVEMENTS

---

- The bigger yoke permits a much higher field respect the standard one (up to +54% at higher gaps)
- More suitable for samples having big size and high coercivity
- Additional thermal protections and controls on the yoke and cabinet
- More powerful power supply in the electrical cabinet
- Finer control of the temperature of the high-T poles with special heating controller

# AMH-500-P HYSTERESISGRAPH

## MAIN ELECTRICAL CABINET



The Main Electrical Cabinet houses the main power and control modules in a compact, safe, and easily integrable structure. It includes the fluxmeters, power supply unit, heating system, and polarity switch, ensuring stable operation and efficient communication with the magnetic measurement equipment.

The cabinet is designed to provide operational reliability, easy maintenance, and optimal integration within magnetization and measurement systems. See technical specs page 10.

## ELECTROMAGNET YOKE MODEL LEP/200-4S



The Electromagnet Yoke Model LEP/200-4S offers high reliability and mechanical stability thanks to its robust yoke structure and precision manufacturing.

It provides easy connectivity with AMH systems and external DC power supplies, while its user-friendly design allows quick pole adjustment and straightforward operation. The larger magnetic circuit enables a field exceeding 3 Tesla, depending on the air gap and coil configuration.

When equipped with special temperature poles, the system allows controlled heating of the sample area up to 220 °C, enabling temperature-dependent measurements with high field uniformity.

The LEP/200-4S is specifically designed for the magnetic characterization of hard magnetic materials, ensuring precise, stable, and repeatable results across the entire operating range.




### AVAILABLE POLES

IRON POLES	IRON COBALT POLES	HEATING POLES	EMBEDDED COILS
LP-60	LPC-50	LPT-80	LP80/9-9
LP-80	LPC-60	LPT-100	
LP-100	LPC-80	LPT-120	
LP-120			
LP-135			


# AMH-500-P & ELECTROMAGNET YOKE MODEL LEP/200-4S FIELD DIAGRAMS

— 2.5 mm — 5 mm — 10 mm — 15 mm — 20 mm — 25 mm — 30 mm


LP-60

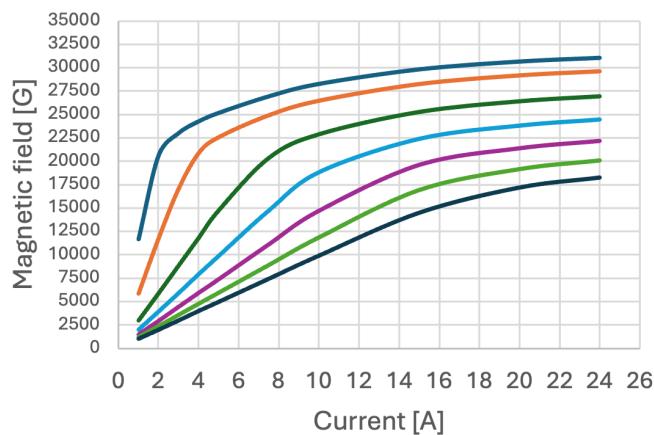


LP-80

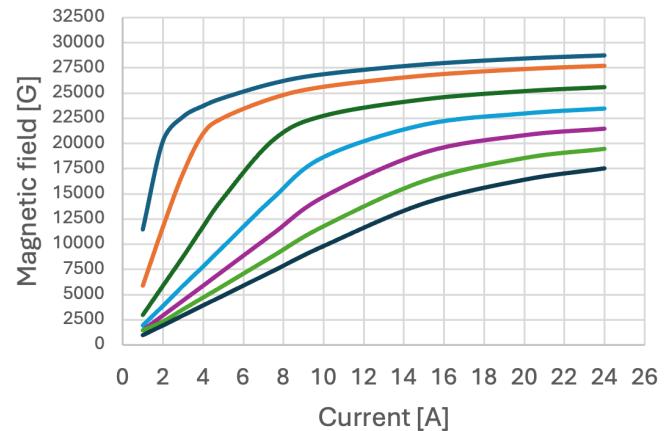


LP-100

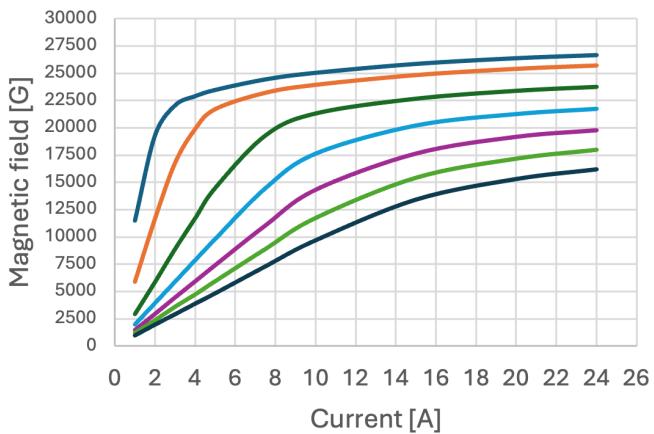

LP-120

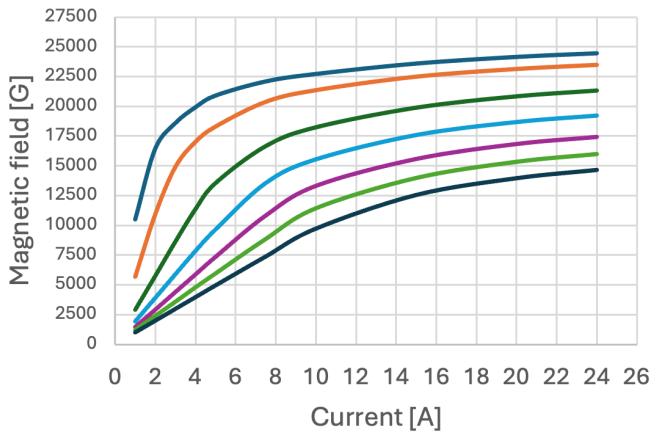

Poles comparison at max current

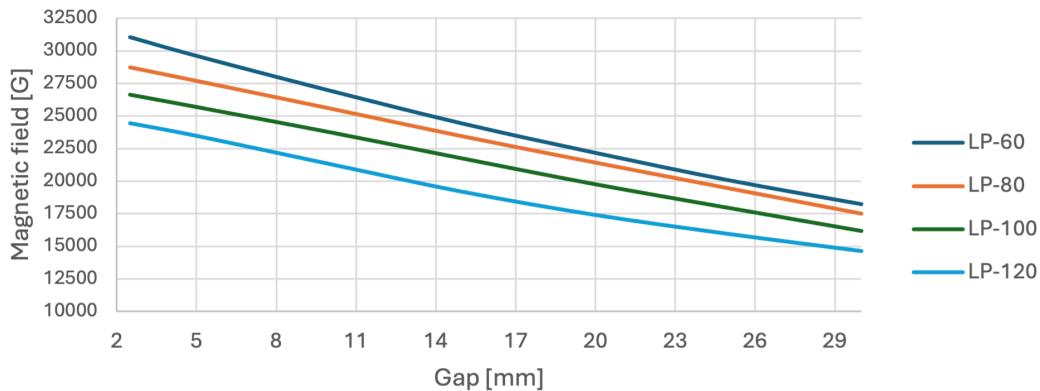

# AMH-500-P ACCESSORIES 1/3

## LJ COMPENSATED COILS



To improve accuracy and resolution, our standard compensated coils measure the J-components with no dependency on the H field measurement. A second set of windings are used to measure the H field. Total B field is derived by the software ( $B=\mu_0 H+J$ ).

### THICKNESS 0,5 mm

### TEMPERATURE RANGE 10÷40°C

TYPE	DIAMETER	USABLE POLES
LJX-10	10 mm - 0,39 in	LP-60
LJX-15	15 mm - 0,59 in	LP-60

### THICKNESS 1 mm

### TEMPERATURE RANGE 10÷40°C

TYPE	DIAMETER	USABLE POLES
LJA-05	5 mm - 0,19 in	LP-40, 60, 80, 100, 120
LJA-10	10 mm - 0,39 in	LP-60, 80, 100, 120
LJA-15	15 mm - 0,59 in	LP-60, 80, 100, 120
LJA-26	26 mm - 1,02 in	LP-60, 80, 100, 120
LJA-42	42 mm - 1,65 in	LP-80, 100, 120
LJA-64	64 mm - 2,51 in	LP-100, 120

### THICKNESS 2,5 mm

### TEMPERATURE RANGE 100÷220°C

TYPE	DIAMETER	USABLE POLES
LJT-05	5 mm - 0,19 in	LP-40, 60, 80, 100, 120
LJT-10	10 mm - 0,39 in	LP-60, 80, 100, 120
LJT-15	15 mm - 0,59 in	LP-60, 80, 100, 120
LJT-26	26 mm - 1,02 in	LP-60, 80, 100, 120
LJT-42	42 mm - 1,65 in	LP-80, 100, 120
LJT-64	64 mm - 2,51 in	LP-100, 120
LJT-73	73 mm - 2,87 in	LP-120
LJT-82	82 mm - 3,22 in	LP-120
LJT-100	100 mm - 3,93 in	LP-135

## LPH-200 SEARCH COIL



LPH-200 can be used alone or combined with embedded poles pieces.

Typical magnetic area	7000 mm <sup>2</sup> - 10,85 in <sup>2</sup>
Stem length	120 mm - 4,72 in
Thickness	2.5 mm - 0,09 in
Active area (diameter)	10 mm - 0,39 in

## HYS REFERENCE SAMPLES



Reference samples are used for the day-to-day control of the Hysteresisgraph calibration. They can be used to validate other measuring systems. Reference samples are included with AMH-500 or available on demand in any size and material.

MODEL	HYS-F	HYS-Nd	HYS-Al	HYS-Sm	HYS-Ni
MATERIAL	Ferrite	NdFeB	Alnico	SmCo	Nickel

# AMH-500-P ACCESSORIES 2/3

## LP IRON POLES



Several models of interchangeable pole pieces are available to ensure the best measurement accuracy. Pure iron pole caps guarantees an uniform field in the gap with a negligible residual field. Pole cap diameters smaller than 120 mm are tapered to concentrate the field produced by the electromagnet.

For example (up to 3.2 T in 2.5 mm gap with LP-60 Pole caps):

TYPE	MAX Ø SAMPLE	USABLE COILS
LP-40	15 mm - 0,59 in	5-15
LP-60	26 mm - 1,02 in	5-26
LP-80	42 mm - 1,65 in	5-42
LP-100	73 mm - 2,87 in	5-73
LP-120	82 mm - 3,22 in	5-82
LP-135	100 mm - 3,93 in	100

See the Electromagnet part page 3.

## LPC IRON COBALT POLES



In order to increase the magnetic field within the gap we have the option to substitute the LP Iron pole pieces with several models of interchangeable iron cobalt (Fe-Co) pole pieces (LPC).

For example:

TYPE	MAX Ø SAMPLE	USABLE COILS
LPC-40	15 mm - 0,59 in	5-15
LPC-50	26 mm - 1,02 in	5-26
LPC-60	26 mm - 1,02 in	5-26
LPC-80	42 mm - 1,65 in	5-42

## LP EMBEDDED COILS



Pole caps with a magnetic sensor embedded below the surface are available. The embedded coils are useful for large ferrite samples (for example loudspeakers magnet) or for deformable sample (bonded ferrite). These coils are Compensated coils for use with the H sensor, model LPH-200.

TYPE	Ø POLE	Ø COIL	WEIGHT
LP-80/9-9	80 mm - 3,14 in	10 mm - 0,39 in	6 kg - 14 lb <sub>(approx)</sub>

# AMH-500-P ACCESSORIES 3/3

## LPT HEATING POLES FOR HIGH TEMPERATURE MEASUREMENTS



Heated Pole caps enable measurements above 220 °C, in agreement with IEC/TR 61807.

Easy connection to the AMH-500 unit and electromagnet.

	LPT-80	LPT-100	LPT 120
Temperature range	20-220 °C	20-220 °C	20-220 °C
Diameter	80 mm - 3,14 in	100 mm - 3,93 in	120 mm - 4,72 in
Uniformity area	45 mm - 1,77 in	75 mm - 2,95 in	95 mm - 3,74 in
Weight	6 kg - 14 lb	10 kg - 22 lb	13 kg - 29 lb

## KIT FOR FERRITE POWDERS MEASUREMENTS



The kit allows the measurement of ferrite magnetic powder at different pressures and densities. The powder is packed in a small case, pressed by accessories having different thicknesses. The various thicknesses result in different pressures and densities for the powder. The software Xenon records that data to enable the evaluation of the magnetic properties vs. density. Additional accessories need compensated coil LJT-26 or LJA-26.

## SHAPED POLES FOR FERRITE ARC MAGNETS




Shaped pole pieces enable the non-destructive quality control of arc-shaped ferrite magnets. This eliminates the difficult task of cutting a regular-size sample from a fragile arc. The B measurement is performed by the coils wound around the pole piece, while the H measurement is performed by the sensor LPH-200. The curvature of arc magnets can vary depending on the application, Laboratorio Elettrofisico can provide custom pole pieces to conform your arc shapes. The measurement is processed within a fixed gap without using a closed circuit set up. This configuration emulates the performance of the magnet in the final application (typically electric motors).

It's no longer necessary to cut measurement material samples from ARC shaped magnets.


# AMH-500-P

## SOFTWARE XENON

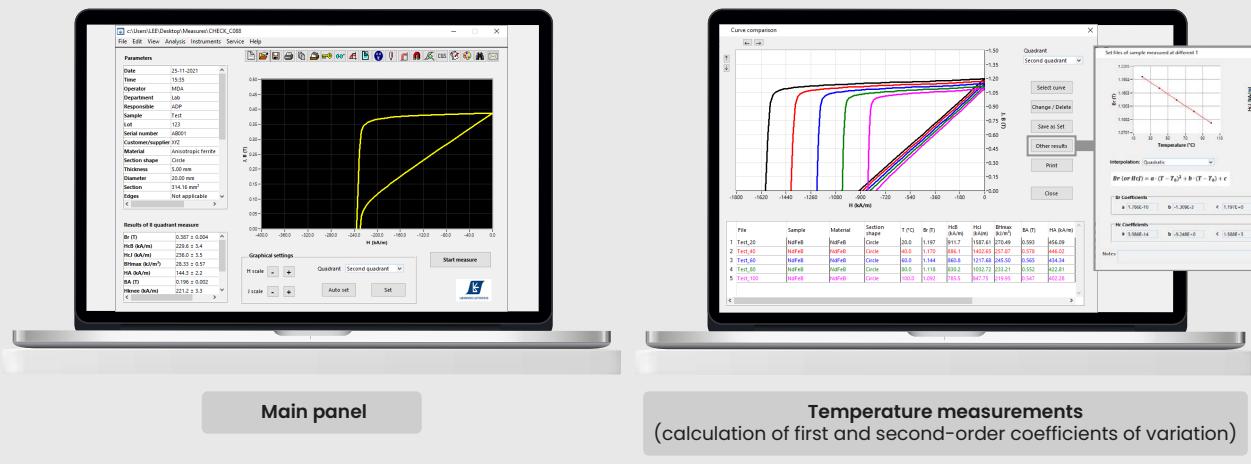

Xenon is a powerful software to manage automatically the measurement and many useful options, such as printing report, database, statistic analysis, etc. It also provides additional help to overcome several physical limitations; extrapolation of the curve at higher or lower temperatures, interpolation of the curve when incomplete or irregular, curve's completion for high-coercivity magnets, etc.


This operating software maintains the overall accuracy controlling all the parameters to ensure the measurement is precise and to prevent operating errors.

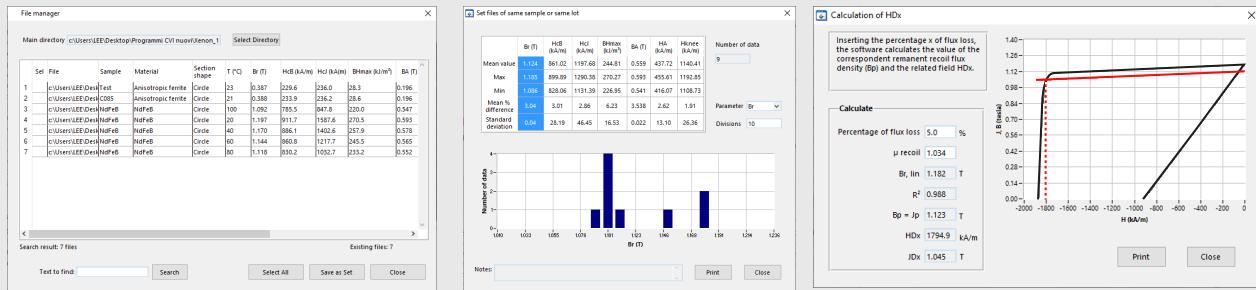

**Integrated database** with a smart search tool, curve organization and collection, and Excel export functions

Statistical elaboration of the data of multiple curves

Calculation of demagnetization field strength HDx, according with IEC 60404-8-1

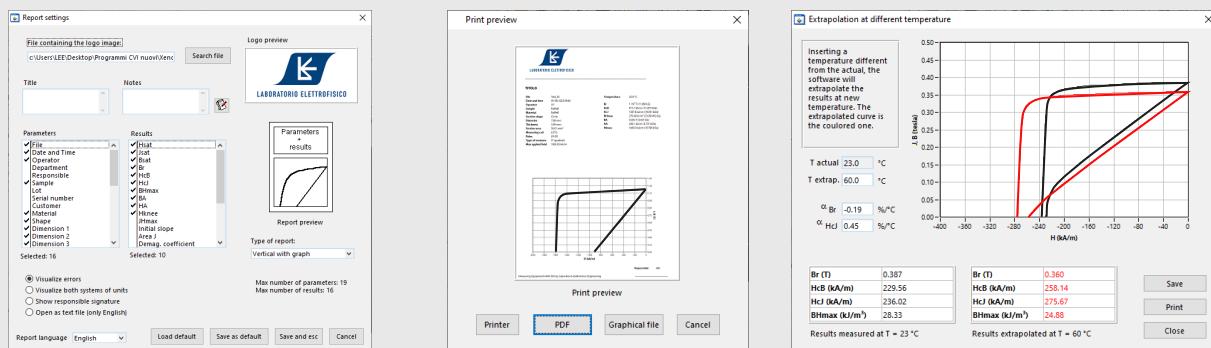

Automatic report setting, with multiple languages choice (included Chinese and Hindi)

Automatic generation and printing of the report (pdf and all main graphical format)

Quick evaluation of the curve and magnet's characteristics at different T using temperature coefficients

# AMH-500-P

## SOFTWARE XENON

### FEATURES

#### TYPE OF MEASUREMENT

- 1st quadrant, 2nd quadrant, 1st and 2nd quadrant
- Complete hysteresis cycle
- Recoil permeability

#### SETTING OF MEASURING PARAMETERS

- Manual or automatic settings of magnetizing and demagnetizing field, speed, resolutions and many other parameters
- Setting of thresholds for direct quality control

#### RESULTS

- Br, HcJ, HcB, BHmax, BA, HA, HKnee, Hsat, Jsat, Bsat, recoil permeability, magnetic moment, anisotropy parameters, load line, working point, T in °C and °F
- Magnetic units in SI and CGS, measures in mm and inches, temperature in °C and °F

#### DATA PROCESSING

- Curve comparison
- Curve extrapolation at higher or lower temperature, for a quick evaluation of the measured curve at different T
- Curve's interpolation, automatic or using a mathematical function from a list
- Extrapolation of uncompleted curves (high-HcJ materials)
- Correction of pole pieces' saturation
- Processing of curves made with shaped poles
- Automatic control of the Fluxmeter's drift

#### PRINTING A REPORT

- 6 pre-set reports with different sizes and contents
- Customized report option for changing the information and the language: 10 languages available for printing (European languages + Chinese & Hindi)
- Direct print or automatic creation of graphical and/or text file
- Reports can be edited

#### DATA BASE AND FILE SEARCHING

- Data base of measuring files with fast search options, ordering, selection, etc.
- Full compatibility with other programs, such as Microsoft Excel™

#### PROTECTION

- Password protection for restricting access according to selected parameters

#### SET OF MEASURES

- Ability to group together different measurements in the same graph. The software recognizes the group type and provides additional results such as statistical data, i.e. the average, standard deviation, etc.

# TECHNICAL SPECIFICATIONS 1/2

## GENERAL

### MEASURABLE MATERIALS

Alnico, Ferrite, NdFeB, SmCo<sub>5</sub>, Sm<sub>2</sub>Co<sub>17</sub>, bonded magnets

**IMPORTANT NOTE:** rare earth magnets need to be saturated externally (for ex. with a pulse magnetizer)

### MEASURABLE QUANTITIES

Br, HcB, HcJ, BHmax, Hknee, HA, BA,  $\mu$ recoil, Jsat, Hsat, load line, temperature coefficients  $\alpha$ Br,  $\alpha$ HcJ, working point, squareness, etc.

### MEASURABLE SHAPES

Cylinder, parallelogram, ring, any prism with parallel bases

### SAMPLE SIZE

Diameter or diagonal from 3 to 82 mm, height from 0.5 to 50 mm

### ACCURACY

Br  $\pm$  1%, HcB, HcJ  $\pm$  1.5%, BHmax  $\pm$  2

### TEST TIME

Less than 30 seconds

## MAIN ELECTRICAL CABINET

### VOLTAGE

170-265 Vac single phase + ground, 50-60 Hz, 16 A absorption

### POWER

3 kVA

### DIMENSIONS

L 506 x W 795 x H 417 mm - L 19,92 in x W 31,29 in x H 16,41 in

### WEIGHT

56 kg - 124 lb (approx.)

### COMMUNICATION

ETHERNET

## FLUXMETER DF (2 UNITS)

### RANGES

(1, 2, 5, 10, 20, 50, 100) x 2000  $\mu$ Wb

### RESOLUTION

from 1  $\mu$ Wb (range 1) to 100  $\mu$ Wb (range 100)

### ACCURACY

$\pm$ 0.5%

### DRIFT

Less than 1 digit/minute

### INPUT IMPEDANCE

10 k $\Omega$  x range

# TECHNICAL SPECIFICATIONS 2/2

## ELECTROMAGNET YOKE MODEL LEP/200-4S

POLES DIAMETER	120 mm - 4,72 in
MAXIMUM AIR GAP	80 mm - 3,15 in
COIL'S RESISTANCE (TWO COILS)	4 Ω
COOLING	Static air
MAX CURRENT	24 A
LOCK	Included
INTERCOIL SPACING	135 mm - 5.31 in
MAX FIELD INTENSITY	See diagrams page 4
MOVEMENT OPERATING	Manual
POLES PIECES SETTING	Micrometric
DIMENSIONS (EXCLUDED UPPER POLES ADJUSTMENT)	L 554 x W 574 x H 1008 mm - L 21,81 in x W 22,59 in x H 39,68 in
WEIGHT	770 kg - 1698 lb <small>(approx.)</small>



**Laboratorio Elettrofisico  
LE GROUP**



**CONTACT US**

[www.laboratorio.elettrofisico.com](http://www.laboratorio.elettrofisico.com)

**EUROPE  
HEADQUARTERS**

- 📍 Italy, Nerviano (Milan)
- 📞 +39 0331 589 785
- ✉️ [italy@elettrofisico.com](mailto:italy@elettrofisico.com)

**USA**

- 📍 Michigan, Lake Orion
- 📞 +1 248 340 7040
- ✉️ [usa@elettrofisico.com](mailto:usa@elettrofisico.com)

**CHINA**

- 📍 Shanghai, Chang Shou Lu
- 📞 +86 135 2439 6693
- ✉️ [china@elettrofisico.com](mailto:china@elettrofisico.com)

**VIETNAM**

- 📍 Hanoi, Anh Minh Building
- 📞 +84 964 174 291
- ✉️ [vietnam@elettrofisico.com](mailto:vietnam@elettrofisico.com)